



Sensor Faucet

CSA B125.1-12

NSF61

CEC

PC

		ST C
Height: 5-1/8" Nozzle Height: 3-3/4"	0.5 gpm	

Water Use

Features

The line 12 is a sensor operated faucet. The faucet body is made from chrome plated lead free brass.

QUADESIGN

Line 12 Faucet

Dimensions

MANUFACTURING

The sensor responds to objects approaching the sensor. The response time is 0.5 seconds and stops once the object leaves the sensor range.

The waterflow will automatically stop after one minute. In this case there will be a time-out of 10 seconds.

The waterflow will stop if the power is interupted or out. This to minimize the waste of water.

If powered by 4 x AA batteries, the battery life will be around 2 years at 300 cycles a day.

Technical Specifications

Power supply:

AC: 110

DC: 4 x AA batteries

- Battery Life: 220,000 water cycles
- Sensor range: 4-6"
- Maximum water flow duration per cycle: 60 seconds
- Water Pressure: 8-87 psi
- Water flow: 0.50 gpm

Application

The L12-faucet is certified lead-free. However to prevent the spread of infections we caution against the use of the faucet for drinking water and recommend using the faucet only for handwashing.

In the Box:

- Sensor Faucet
- Control Box with Plug-in transformer
- 4" deck plate

Certifications

cUPC (ASME A112.18.1-2012/CSA B125.1-12)

<u>3</u>-15/16<u>"</u> (100mm)

3-3/4 (95mm)

Technical

Supplies: 1/2" IPS

Inlet Pressure: 8-87 psi

Detection Range: 4"-6"


Power: 110V Plug in Transformer

4 x 1.5V AA Batteries

- NSF 372 (AB1953)
- NSF61
- CEC (California Energy Commission)

Warranty

2 year limited warranty.

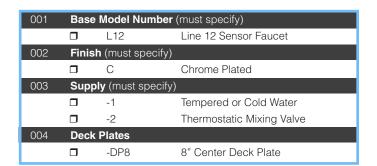



Barrier Free ADA

TAS

Alberta Building Code

Ontario Barrier Free

BC Building Code

Code Construction Québec

5-1/8" (130mm)