



Line 14 Faucet

L14C

Sensor Gooseneck Faucet

Dimensions	Water Use	Certifications	Technical	Barrier Free
Height: 9-3/4" Nozzle Height: 6-7/8"	0.5 gpm	 NSF372 (AB1953) ASME A112.18.1-2012 CSA B125.1-12 NSF61 CEC	Supplies: 1/2" IPS Inlet Pressure: 8-87 psi Detection Range: 4"-6" Power: 110V Plug in Transformer 4 x 1.5V AA Batteries	ADA TAS Alberta Building Code Ontario Barrier Free BC Building Code Code Construction Québec

Features

The line 14 is a sensor operated faucet. The faucet body is made from chrome plated lead free brass.

The sensor responds to objects approaching the sensor. The response time is 0.5 seconds and stops once the object leaves the sensor range.

The waterflow will automatically stop after one minute. In this case there will be a time-out of 10 seconds.

The waterflow will stop if the power is interrupted or out. This to minimize the waste of water.

If powered by 4 x AA batteries, the battery life will be around 2 years at 300 cycles a day.

Technical Specifications

- Power supply:
 - AC: 110
 - DC: 4 x AA batteries
- Battery Life: 220,000 water cycles
- Sensor range: 4-6"
- Maximum water flow duration per cycle: 60 seconds
- Water Pressure: 8-87 psi
- Water flow: 0.50 gpm

In the Box:


- Sensor Faucet
- Control Box with Plug-in transformer

Certifications

- cUPC (ASME A112.18.1-2012/CSA B125.1-12)
- NSF 372 (AB1953)
- EPA Watersense™
- CEC (California Energy Commission)

Warranty

2 year limited warranty.

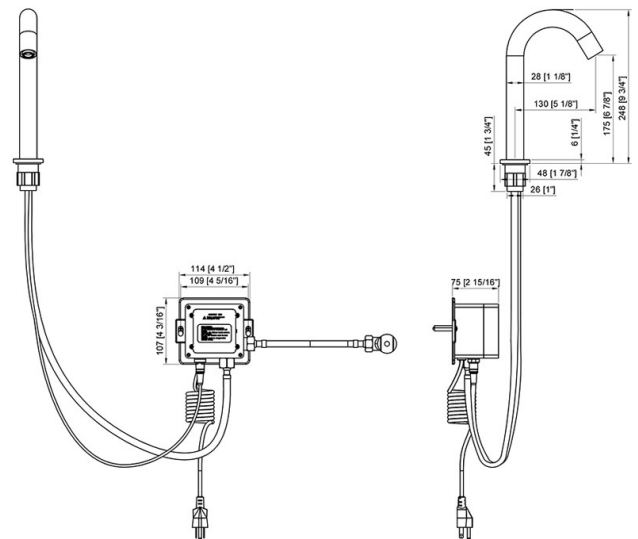

001	Base Model Number (must specify)	
<input type="checkbox"/>	L14C	Line 14 Sensor Faucet
002	Supply (must specify)	
<input type="checkbox"/>	-1	Tempered or Cold Water
<input type="checkbox"/>	-2	Thermostatic Mixing Valve



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov