



Wash Basin - Series 5

55

Five User Wash Basin

Dimensions	Water Use	Certifications	Technical	Barrier Free
118 ^{1/8} ″ x 18 ^{7/8} ″ x 7 ^{3/4} ″	0.5 - 2.0 gpm	ASME A112.18.2-2011 CSA B125.2-11 ASME A112.19.3-2008 CSA B45.4-08	Drain: 1 ½" Supplies: ½" Inlet Pressure: 17-100 psi	ADA TAS Alberta Building Code Ontario Barrier Free BC Building Code Code Construction Quèbec

Material & Construction

The wash basin is constructed of type 304 stainless steel, with a #4 satin finish. The sides are the wash basin are 16 gauge, the basin is 19 gauge.

The sidewalls of the wash basin are seamlessly welded from within. The benefit to the elimination of any interior seams is that it removes hidden locations where bacteria can form. To assist in maintaining the wash basin. All interior corners of the basin are more than 90 degrees, which promotes rapid drainage to the center of the basin.

The drain strainer is fully seamless and is an integral part of the wash basin

When faucets are supplied they will be supplied with a water supply manifold made from 1/2" PEX tubing.

Water Activation

The wash basin can be supplied with a wide range of electronic and manual faucets.

Soap

The wash basin can be supplied with any of AquaDesign's electronic soap dispensers.

Application



The Series 5 Wash Basin is intended for handwashing only. It is not to be used to dispense water for human consumption either by drinking or use in the preparation of food or beverages.

LEED Compliance

The wash basin with the AquaDesign's faucets contributes to meeting LEED requirements in the following categories:

WEp1 - Water Efficiency WEc3 - Water Use Reduction

Some AquaDesign faucets have a water flow of 0.35 gpm.

Warranty


 $5\,\mbox{years}$ limited warranty on material and $1\,\mbox{year}$ limited warranty on components.




WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov

Wash Basin Series 5 55


Top View

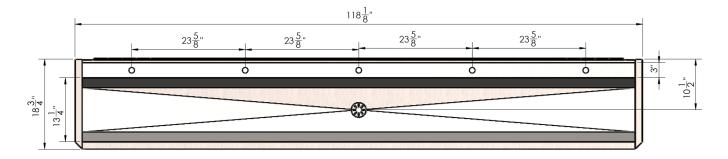

Front View




Side View



Wash Basin Series 5 55

Rough-In Dimensions

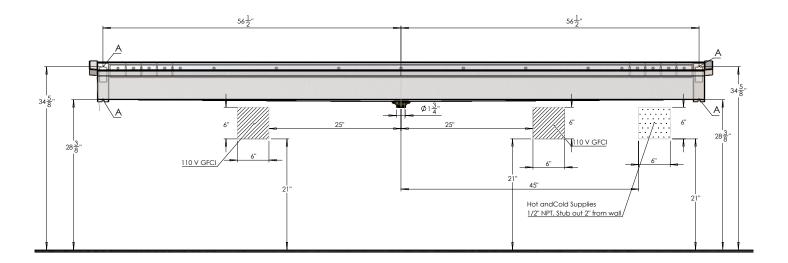

Code	Description
Α	1/4" Anchors

Notes:

- Electrical receptacle must be wired to a GFCI protected circuit. Fixture must be earth grounded. Consult local electrical code for need and use of extra electrical conduit box.
- All height dimensions are measured from the FINISHED floor

Height Adjustments

Standard	Rim Height	Adjustment of A, B& W
ADA & TAS Adult	34"	None
Ontario Barrier Free	840 mm	Subtract 1" from height in drawing
Alberta & BC Buidling Code, Ontario Barrier Free	865 mm	None
Code Construction Quèbec	865 mm	Aucun

Wash Basin Series 5 55

Faucet Options



-OMW Faucet



-L13 Faucet



-OMS Faucet



-L14 Faucet



-L12 Faucet



-L70 Faucet

Soap Dispenser Options



-SD12 Soap Dispenser

Wash Basin Series 5

001	Base Model Number (must specify)				
		55	Five User Line 5 Wash Basin		
002	Fauce	Faucet (must specify)			
	0 0 0 0	-Z01 -OMW -OMS -L12 -L13 -L14	No Faucet, No Supply Line Omnia Water Only Faucet Omnia Water and Soap Faucet Line 12 Sensor Faucet Line 13 Sensor Faucet Line 14 Sensor Faucet Line 70 Push Button Faucet		
003	Soap	Soap Dispensers			
		-SD12	Line 12 Soap Dispenser		
004	Other Options				
	_ _ _	-TMV -HW -LEG	Thermostatic Mixing Valve Plug-in Transformer for Sensor Faucet 2-Stainless Steel Legs		

Approved by:
Name:
Title:
Signature:
Date: