



Nozzle adjustable



DESCRIPTION


- Nozzle preset at 0.8 gpm.
- Water flow can be adjusted between 0.4 gpm and 1.6 gpm.
- No interior divisions. Limits the build-up of bacteria and lime scale..
- M24/100
- Adjustment by means of a 2.5 mm allen key.

ADVANTAGES

- 
 Helps prevent the growth of bacteria
- 
 Adjustable water flow between 0.4 gpm and 1.6 gpm

TECHNICAL CHARACTERISTICS

Thread	M24/100
Finish	Chromed brass
Warranty	10 year limited

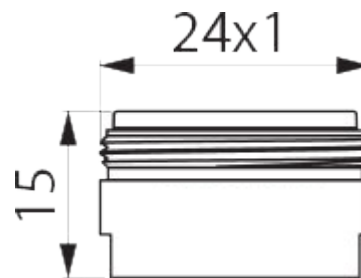

*dimensions in mm



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov