

Two User Lavatory System

Dimensions	Water Use	Certifications	Technical	Barrier Free
60"-90" x 21" x 13 ^{3/4} "	0.5 gpm	IAPMO Z124-2011 CSA B45.5-11 IAPMO IGC156 ASME A112.18.2-2011 CSA B125.2-11	Drain: 1 ¼" Supplies: ½" IPS Inlet Pressure: 20-100 psi	ADA TAS Alberta Building Code Ontario Barrier Free BC Building Code Code Construction Quèbec

Material & Construction

The innovative bowl is made from solid surface. Solid surface is a composite material of acrylic polyester polymer resins and aluminum trihydrate fillers. The material is resistant to stains and burns and complies with ANSI Z124.3. Solid surface cleans easily with Scotchbrite®, household cleaners or fine grit sandpaper. Solid surface is available in 6 colors.

The Streamlav View includes heavy gauge steel powder coated support brackets.

Standard Equipment

Countertop in solid surface material, steel mounting bracket & tail piece.

Optional Equipment

The Streamlav View can be supplied with a stainless steel skirt assembly (Model -B). An extended skirt is also available (Model -BE).

The Streamlav View can be supplied with any of AquaDesign's faucets or can be drilled for faucets by others.

When choosing faucets by others try to minimize splashing by choosing faucets that are less than 4.5" in height (base faucet to aerator bottom). Aerators with a spray pattern are preferably 0.38 GPM or less, laminar or aerated aerators are preferably 0.5 GPM or less.

Configurations

The Streamlav View can be supplied in custom lengths from 60" to 90".

LEED Compliance

The Streamlav View' contributes to meeting LEED requirements in the folloView categories:

WEp1 - Water Efficiency WEc3 - Water Use Reduction

AquaDesign's faucets have a standard water usage of 0.5 gpm.

Application



The Streamlav View is intended for handwashing only. It is not to be used to dispense water for human consumption either by drinking or use in the preparation of food or beverages.

Warranty

Warranty: 5 years limited warranty on material and 1 year limited warranty on components.


SAMPLE SPECIFICATION


Fixture shall be AquaDesign Streamlav View two user hand wash station. Countertop is made from solid surface. The unit will be 60" to 90" long.

The unit is furnished with a Line12/Line13/Line14/Line70/Omnia faucet.





Top View

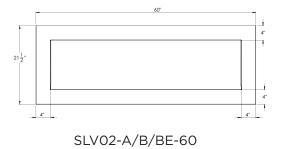


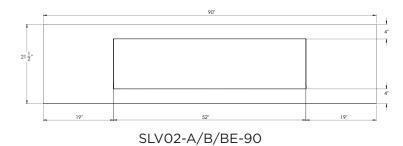


Front View

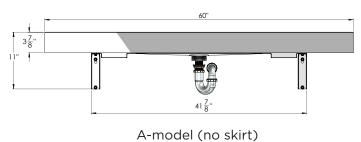



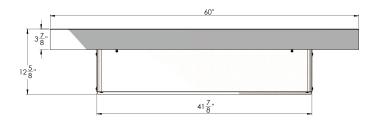




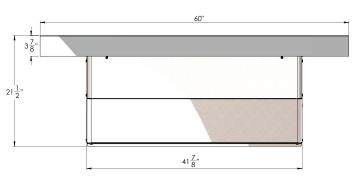


BE-model (extended skirt)


^{*} All dimensions have a tolerance of 1/16"


Side View

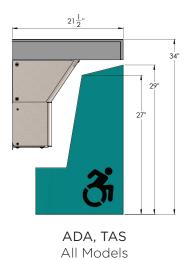





ADA - Juvenile Height All Models

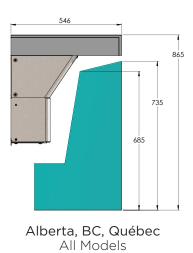

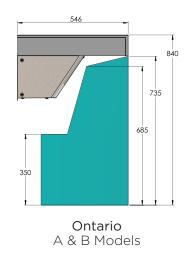



Rough-In Dimensions SLV02-A (No Skirt Option)

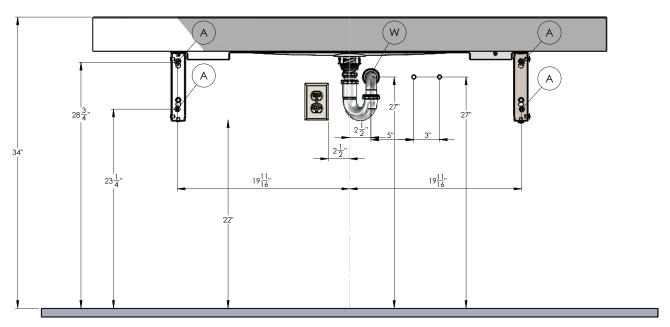


^{*} All vertical measurements are measured from the FINISHED floor

Code	Description
А	3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
R	110V GFCI Outlet

Height Adjustments

Standard	Rim Height	Adjustment of height for A, B, W, S & R
ADA & TAS Adult	34"	None
ADA Juvenile, Ages 6-12	31"	Subtract3" to height in drawing
TAS, Grades 6 through 8 or 9	32"	Subtract2" to height in drawing
TAS, Pre-K through Grades 5 or 6	30"	Subtract4" to height in drawing

Rough-In Dimensions SLV02-B/SLV02-BE (with Skirt Option)

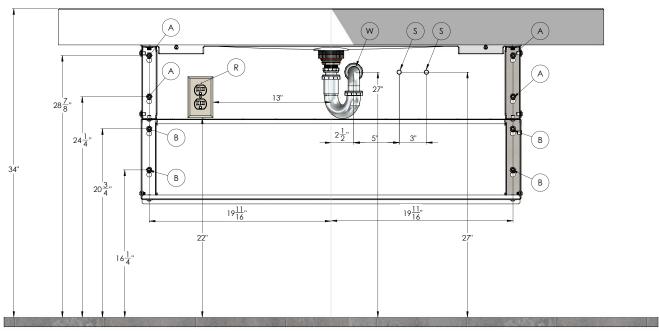


^{*} All vertical measurements are measured from the FINISHED floor

Code	Description
А	3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
В	Only if skirt extension - 3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
R	110V GFCI Outlet

Height Adjustments

Standard	Rim Height	Adjustment of height for A, B, W, S & R
ADA & TAS Adult	34"	None
ADA Juvenile, Ages 6-12	31"	Subtract3" to height in drawing
TAS, Grades 6 through 8 or 9	32"	Subtract2" to height in drawing
TAS, Pre-K through Grades 5 or 6	30"	Subtract4" to height in drawing

Rough-In Dimensions Omnia Option

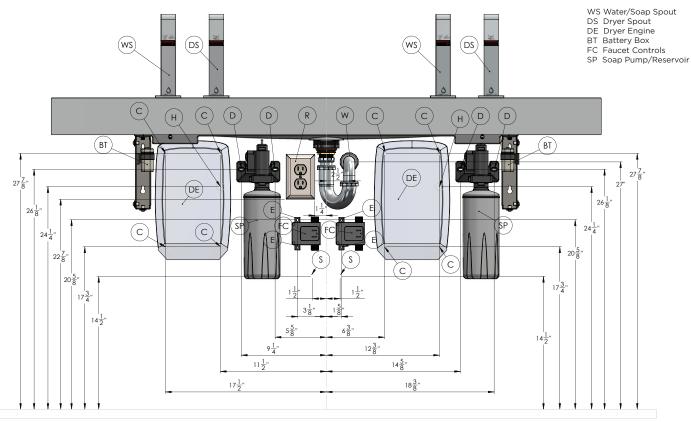


- * All vertical measurements are measured from the FINISHED floor
- ** Use dimesions of page 4 or 5 for location of mounting bracket anchors

Code	Description
С	1/4" anchors for dryer engine
D	1/8" anchors for soap pump
Е	1/8" anchors for water controls
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
Н	Hardwire location for dryer engine
R	110V GFCI Outlet

Height Adjustments

Standard	Rim Height	Adjustment of height for A, B, W, S & R
ADA & TAS Adult	34"	None
ADA Juvenile, Ages 6-12	31"	Subtract3" to height in drawing
TAS, Grades 6 through 8 or 9	32"	Subtract2" to height in drawing
TAS, Pre-K through Grades 5 or 6	30"	Subtract4" to height in drawing

Layout with Line 12 Soap Dispenser

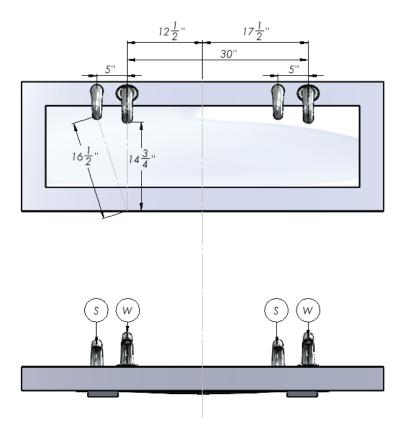

Streamlay View

Approved by:
Name:
Title:
Signature:
Date: