

Three User Lavatory System

Dimensions	Water Use	Certifications	Technical	Barrier Free
90"-120" x 21" x 13 ^{3/4} "	0.5 gpm	IAPMO Z124-2011 CSA B45.5-11 IAPMO IGC156 ASME A112.18.2-2011 CSA B125.2-11	Drain: 1 1/4" Supplies: 1/2" IPS Inlet Pressure: 20-100 psi	ADA TAS Alberta Building Code Ontario Barrier Free BC Building Code Code Construction Quèbec

Material & Construction

The innovative bowl is made from solid surface. Solid surface is a composite material of acrylic polyester polymer resins and aluminum trihydrate fillers. The material is resistant to stains and burns and complies with ANSI Z124.3. Solid surface cleans easily with Scotchbrite®, household cleaners, or fine-grit sandpaper. Solid surface is available in 6 colors.

The Streamlav View includes heavy-gauge steel powder-coated support brackets.

Standard Equipment

Countertop in solid surface material, steel mounting bracket & tailpiece.

Optional Equipment

The Streamlav View can be supplied with a stainless steel skirt assembly (Model -B). An extended skirt is also available (Model -BE).

The Streamlav View can be supplied with any of AquaDesign's faucets or can be drilled for faucets by others.

When choosing faucets by others try to minimize splashing by choosing faucets that are less than 4.5" in height (base faucet to aerator bottom). Aerators with a spray pattern are preferably 0.38 GPM or less, laminar or aerated aerators are preferably 0.5 GPM or less.

Configurations

The Streamlav View can be supplied in custom lengths from 90" to 120".

LEED Compliance

The Streamlav View* contributes to meeting LEED requirements in the folloView categories:

WEp1 - Water Efficiency WEc3 - Water Use Reduction

AquaDesign's faucets have a standard water usage of 0.35 gpm.

Application



The Streamlav View is intended for handwashing only. It is not to be used to dispense water for human consumption either by drinking or use in the preparation of food or beverages.


Warranty

Warranty: 5 years limited warranty on material and 1 year limited warranty on components.

SAMPLE SPECIFICATION

Fixture shall be AquaDesign Streamlav View three user hand wash station. Countertop is made from solid surface. The unit will be 90" to 120" long.

The unit is furnished with a Line12/Line13/Line14/Line70/Omnia faucet.



Top View




SLV03-A/B/BE-90




SLV03-A/B/BE-120


Front View



A-model (no skirt)




B-model (standard skirt)

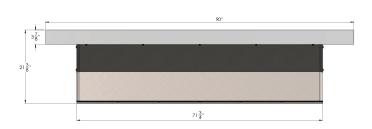


BE-model (extended skirt)


^{*} All dimensions have a tolerance of 1/16"


Side View






ADA - Juvenile Height All Models








SLV03 - Rev.250915

Rough-In Dimensions SLV03-A (No Skirt Option)

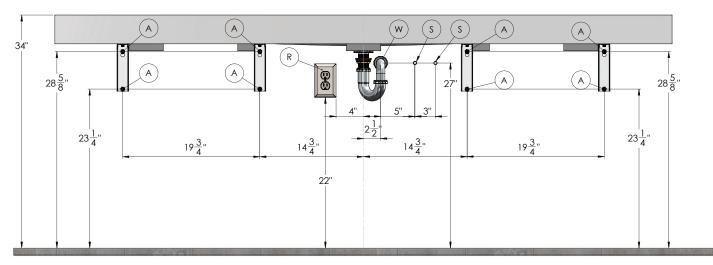


^{*} All vertical measurements are measured from the FINISHED floor

Code	Description
Α	3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
R	110V GFCI Outlet

Height Adjustments

Standard	Rim Height	Adjustment of height for A, B, W, S & R
ADA & TAS Adult	34"	None
ADA Juvenile, Ages 6-12	31"	Subtract3" to height in drawing
TAS, Grades 6 through 8 or 9	32"	Subtract2" to height in drawing
TAS, Pre-K through Grades 5 or 6	30"	Subtract4" to height in drawing

Rough-In Dimensions SLV03-B/SLV03-BE (with Skirt Option)

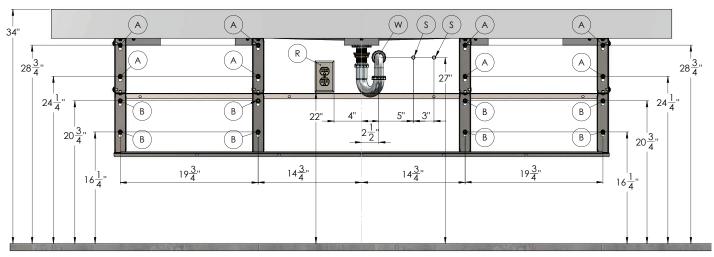


^{*} All vertical measurements are measured from the FINISHED floor

Code	Description
А	3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
В	Only if skirt extension - 3/8" Anchors for support brackets with a pull out strength of min. 1000 lbs.
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
R	110V GFCI Outlet

Height Adjustments

Standard	Rim Height	Adjustment of height for A, B, W, S & R
ADA & TAS Adult	34"	None
ADA Juvenile, Ages 6-12	31"	Subtract3" to height in drawing
TAS, Grades 6 through 8 or 9	32"	Subtract2" to height in drawing
TAS, Pre-K through Grades 5 or 6	30"	Subtract4" to height in drawing


Rough-In Dimensions Omnia Option

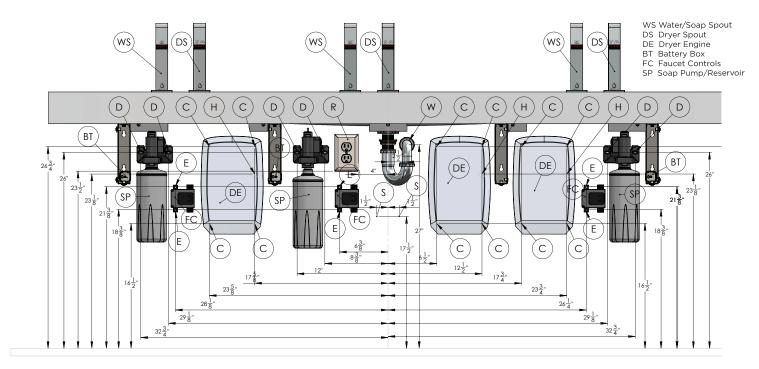

- * All vertical measurements are measured from the FINISHED floor
- ** Use dimesions of page 4 or 5 for location of mounting bracket anchors

Code	Description
С	1/4" anchors for dryer engine
D	1/8" anchors for soap pump
E	1/8" anchors for water controls
W	1-1/4" NPT Drain, stub out 2"
S	1/2" copper tubing for hot & cold supplies, stub out 2"
Н	Hardwire location for dryer engine
R	110V GFCI Outlet

Layout with Line 12 Soap Dispenser

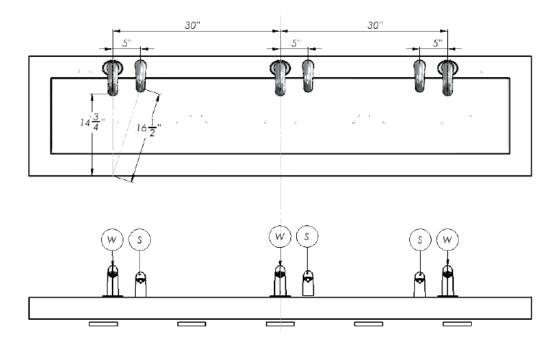

001	Base	Model Numb	er (must specify)
001		SLV03	Single User Streamlav View Lavatory System
002			/ (must specify)
003	0	-90 -120 -CUST	90" Length 120" Length Custom Length
004		-A -B -BE	No Skirt Standard Stainless Steel Skirt Extended Stainless Steel Skirt
004	Ope	-L12 -L13 -L14 -OMW -OML -L70 -DEK	Line 12 Sensor Faucet Line 13 Sensor Faucet Line 14 Sensor Faucet Omnia Sensor Faucet Omnia Water & Soap Sensor Faucet Line 70 Pushbutton Faucet No Faucet (specify faucet that will be used)
005	Supp	oly (must spec	ify)
	_	-TEM -TMV	Tempered or Cold Water Thermostatic Mixing Valve
006	Colo	r (must specif	y)
006		r (must specif dard Colors -AW -MG -PW -SA -SR -TG	Ash White Misty Grey Polar White Sandstone Sydney Rock Oyster Twilight Grey
006	Stan	dard Colors -AW -MG -PW -SA -SR	Ash White Misty Grey Polar White Sandstone Sydney Rock Oyster
006	Stan	dard Colors -AW -MG -PW -SA -SR -TG	Ash White Misty Grey Polar White Sandstone Sydney Rock Oyster Twilight Grey
	Stan	dard Colors -AW -MG -PW -SA -SR -TG	Ash White Misty Grey Polar White Sandstone Sydney Rock Oyster Twilight Grey (specify custom color)
	Stan. Cust. Soar	dard Colors -AW -MG -PW -SA -SR -TG om Color - o (for -A & -BE -SD12	Ash White Misty Grey Polar White Sandstone Sydney Rock Oyster Twilight Grey (specify custom color) models only) Line 12 Soap Dispenser

Approved by:
Name:
Title:
Signature:
Date: